

VALVES & COUPLERS
2015 EDITION

BOLTED BALL VALVES

- Manufactured from glass re-inforced polypropylene for strength and durability – will never rust or corrode.
- Self-aligning ball rotates freely against Teflon® seats.
- Unique body-to-flange design allows for low torque on/off operation.
- Viton O-ring stem seal and EPDM O-ring body seal.
- Available with blue Norwesco handle or blank yellow handle.
- Pressure rated at 125 PSI @ 70°F.
- All valves tested by air pressure under water.

RECOMMENDED OPERATING PRESSURE

½" thru 3": 100 PSI @ 0°F / 125 PSI @ 70°F / 70 PSI @ 150°F
4": 70 PSI @ 0°F / 90 PSI @ 70°F / 50 PSI @ 150°F

ITEM CODE	DESCRIPTION	BLUE HANDLE PART NO.	YELLOW HANDLE PART NO.	STANDARD PACKAGING
A	½" Full Port	60540	61115	24
A	¾" Full Port	60541	61116	24
A	1" Standard Port	60542	61117	24
A	1" Full Port	60543	61118	24
A	1¼" Standard Port	61734	61119	24
A	1¼" Full Port	60527	61120	24
A	1½" Full Port	60526	61121	24
D	1½" Full Port Nozzle	60544	61125	12
A	2" Standard Port	60529	61122	24
C*	2" Standard Port M x F	62046	—	24
D	2" Standard Port Nozzle	60545	61126	12
B	2" Full Port	60528	61123	12
C	2" Full Port M x F	61876	—	12
D	2" Full Port Nozzle	60546	61127	9
B	3" Full Port	61720	61124	8
C	3" Full Port M x F	62047	—	8
E	4" Full Port	62787	62788	4

*4 bolt square, not 6 bolt hex

COMPACT BOLTED BALL VALVES

- Male pipe thread end flange and cam action coupler end flange eliminate the need for additional fittings.
- Manufactured from glass re-inforced polypropylene for strength and durability – will never rust or corrode.
- Self-aligning ball rotates freely against Teflon® seats.
- Unique body-to-flange design allows for low torque on/off operation.
- Viton O-ring stem seal and EPDM O-ring body seal.
- Available with blue Norwesco handle or blank yellow handle.
- Pressure rated at 125 PSI @ 70°F.
- All valves tested by air pressure under water.

RECOMMENDED OPERATING PRESSURE

100 PSI @ 0°F / 125 PSI @ 70°F / 70 PSI @ 150°F

ITEM CODE	DESCRIPTION	BLUE HANDLE PART NO.	YELLOW HANDLE PART NO.	STANDARD PACKAGING
F	2" Full Port M x F	62286	62308	12
G	2" Full Port F x F	62287	62309	12
H	2" Full Port M x M Coupler	62288	62310	12
I	2" Full Port F x M Coupler	62314	62313	12

SINGLE UNION BALL VALVES

- Manufactured from polypropylene.
- Teflon® seats.
- EPDM O-rings (viton kits available).
- Pressure rated at 125 PSI @ 70°F.
- All valves tested by air pressure under water.

RECOMMENDED OPERATING PRESSURE

100 PSI @ 0°F / 125 PSI @ 70°F / 70 PSI @ 150°F

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
A	½" Single Union	60409	24
A	¾" Single Union	60410	24
A	1" Single Union	60411	24
A	1¼" Single Union	60412	12
A	1½" Single Union	60413	12
A	2" Single Union	60414	12
A	3" Single Union	60415	4
B	1" 45° Nozzle Valve	60479	24

MULTI-PORT BALL VALVES

- Manufactured from polypropylene.
- Teflon® seats.
- EPDM O-rings (viton kits available).
- Pressure rated at 125 PSI @ 70°F.
- All valves tested by air pressure under water.
- Three position settings: bottom-to-right, bottom-to-left or off.

RECOMMENDED OPERATING PRESSURE

100 PSI @ 0°F / 125 PSI @ 70°F / 70 PSI @ 150°F

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
C	¾" True Union (Full Port)	60417	24
D	2" Multi-port (Standard Port)	60418	12

STAINLESS STEEL BALL VALVES

- Manufactured from 316 stainless steel.
- Full port construction.
- Water, oil and gas rated to 1000 PSI.
- Locking handle.
- Teflon® seats and seals.
- Polished stainless steel ball for precise operation.
- Tested by air pressure under water.

RECOMMENDED OPERATING PRESSURE

1,000 PSI @ -20°F / 1,000 PSI @ 100°F / 200 PSI @ 350°F

ITEM CODE	DESCRIPTION	PART NO.
E	¾" Full Port	60480
E	½" Full Port	60481
E	¾" Full Port	60482
E	1" Full Port	60483
E	1¼" Full Port	60484
E	1½" Full Port	60485
E	2" Full Port	60487
E	3" Full Port	60488

REPLACEMENT PARTS AVAILABLE. SEE PAGE 15.

A

B

C

D

E

CAM ACTION COUPLERS AND ADAPTERS

- Manufactured from glass re-inforced polypropylene.
- Smooth operating stainless steel cam arms and pins.
- Standard with EPDM gaskets.
- Interchangeable with other couplers and adapters.

RECOMMENDED OPERATING PRESSURE

1/2" thru 2": 100 PSI @ 0°F / 125 PSI @ 70°F / 70 PSI @ 150°F
3" and 4": 70 PSI @ 0°F / 90 PSI @ 70°F / 50 PSI @ 150°F

ITEM CODE	DESCRIPTION	1/2"	3/4"	1"	1 1/4"	SIZE AND PART NO.		3"	4"
A	Male Adapter - Female Thread	61199	61207	61215	61223	61231	61239	61247	62789
B	Female Coupler - Male Thread	61255	61259	61263	61267	61271	61275	61279	62790
B	Female Coupler - Male Thread, Long*	—	—	—	—	—	63961	63962	—
C	Female Coupler - Hose Shank	61256	61260	61264	61268	61272	61276	61280	62791
D	Female Coupler - Female Thread	61257	61261	61265	61269	61273	61277	61281	62792
E	Male Adapter - Hose Shank	61203	61211	61219	61227	61235	61243	61251	62793
F	Male Adapter - Male Thread	61204	61212	61220	61228	61236	61244	61252	62794
DC	Dust Cap for Male Adapter	61258	61258	61266	61274	61274	61278	61282	62795
DP	Dust Plug for Female Coupler	61214	61214	61222	61238	61238	61246	61254	62796

Standard Packaging: 1/2" thru 3" = 24; 4" = 8

WARNING: Do not release cam arms when liquid in the line is under pressure.

NOTE: 1/2" couplers and adapters will interchange with 3/4" couplers and adapters. Only the threads and barbs are 1/2".

1 1/4" couplers and adapters will interchange with 1 1/2" couplers and adapters. Only the threads and barbs are 1 1/4".

*Extended length between male thread and coupler.

REPLACEMENT
PARTS AVAILABLE.
SEE PAGE 15.



90° CAM ACTION COUPLERS AND ADAPTERS

- Manufactured from glass re-inforced polypropylene.
- Reduces the number of joints in piping applications.
- Smooth operating stainless steel cam arms and pins.
- Standard with EPDM gaskets.
- Interchangeable with other couplers and adapters.
- Pressure rating 125 PSI @ 70°F.

**RECOMMENDED
OPERATING
PRESSURE**

100 PSI @ 0°F / 125 PSI @ 70°F / 70 PSI @ 150°F

ITEM CODE	DESCRIPTION	SIZE AND PART NO.	
		1½"	2"
90°A	Male Adapter with Female Thread	61293	61296
90°C	Female Coupler with Hose Shank	61299	61301
90°D	Female Coupler with Female Thread	61300	61302
90°F	Male Adapter with Male Thread	61289	61291

Standard Packaging: 24

WARNING: Do not release cam arms when liquid in the line is under pressure.

KING NIPPLES

- King Nipples manufactured from glass re-inforced polypropylene.

**RECOMMENDED
OPERATING
PRESSURE**

100 PSI @ 0°F / 125 PSI @ 70°F / 70 PSI @ 150°F

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
E	1½"	61319	24
E	2"	61861	24
F	3"	61321	24
F	4"	62468	—

HOSE BARBS

- Hose Barbs manufactured from polypropylene.

**RECOMMENDED
OPERATING
PRESSURE**

100 PSI @ 0°F / 125 PSI @ 70°F / 70 PSI @ 150°F

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
G	½"	61303	50
G	¾"	61304	50
G	1"	61305	25
—	1¼" MPT x 1" HB Elbow	62469	—



FLANGE BALL VALVES / FITTINGS

- Quick and easy assembly. No pipe tape or sealant necessary.
- Positive seals.
- Easy on/off hose connections.
- 360° orientation.
- Valves and fittings are manufactured from glass re-inforced polypropylene for strength and durability – will never rust or corrode.



VALVES

- Self-aligning ball rotates freely against Teflon® seats.
- Unique body-to-flange design allows for low torque on/off operation.
- Viton O-ring stem seal and EPDM O-ring body seal.
- Available with blue Norwesco handle or blank yellow handle.
- Pressure rated at 125 PSI @ 70°F.
- All valves tested by air pressure under water.

**RECOMMENDED
OPERATING
PRESSURE**

100 PSI @ 0°F / 125 PSI @ 70°F / 70 PSI @ 150°F

ITEM CODE	DESCRIPTION	BLUE HANDLE PART NO.	YELLOW HANDLE PART NO.	STANDARD PACKAGING
A	1" Full Port Flange x Flange (4 bolt)	63027	63028	24
A	2" Full Port Compact Flange x Flange (4 bolt)	63122	63123	12
A	3" Full Port Flange x Flange (6 bolt)	63124	63125	8

STAINLESS STEEL WORM SCREW HOSE CLAMPS FOR FLANGE FITTINGS

ITEM CODE	DESCRIPTION	PART NO.
B	1"	62932
B	2"	62933
B	3"	62934

EPDM FLANGE GASKET FOR FLANGE FITTINGS

ITEM CODE	DESCRIPTION	PART NO.
C	1"	62935
C	2"	61574
C	3"	61575

REPLACEMENT PARTS AVAILABLE. SEE PAGE 14.



1" FITTINGS

ITEM CODE	DESCRIPTION	PART NO.
D	1" Flange Tee	62912
E	1" Flange Elbow	62913
F	1" Flange Coupling	62914
G	1" Flange x ¾" MPT	63098
G	1" Flange x 1" MPT	62915
G	1" Flange x 1¼" MPT	63099
H	1" Flange x 1" FPT	62916
I	1" Flange x ¾" HB	62917
I	1" Flange x 1" HB	62918
I	1" Flange x 1¼" HB	62919
J	1" Flange x ¾" HB 90°	62920
J	1" Flange x 1" HB 90°	62921
J	1" Flange x 1¼" HB 90°	62922
K	1" Flange Cross	62923
L	1" Flange Plug	62924
M	1" Flange Plug with ¼" FPT	62925

2" FITTINGS

ITEM CODE	DESCRIPTION	PART NO.
D	2" Flange Tee	63100
E	2" Flange Elbow	63101
F	2" Flange Coupling	63102
G	2" Flange x 2" MPT	63103
H	2" Flange x 2" FPT	63104
I	2" Flange x 1½" HB	63105
I	2" Flange x 2" HB	63106
J	2" Flange x 1½" HB 90°	63107
J	2" Flange x 2" HB 90°	63108
K	2" Flange Cross	63109
L	2" Flange Plug	63110
N	2" Flange x 1" Flange Reducing Coupling	62927
O	2" Flange x 2" Male Coupler	62926

3" FITTINGS

ITEM CODE	DESCRIPTION	PART NO.
D	3" Flange Tee	63111
E	3" Flange Elbow	63112
F	3" Flange Coupling	63113
G	3" Flange x 3" MPT	63114
I	3" Flange x 2" HB	63115
I	3" Flange x 3" HB	63116
J	3" Flange x 2" HB 90°	63117
J	3" Flange x 3" HB 90°	63118
K	3" Flange Cross	63119
L	3" Flange Plug	63120
N	3" Flange x 2" Flange Reducing Coupling	62928
O	3" Flange x Male Coupler	63121

**RECOMMENDED
OPERATING
PRESSURE**

120 PSI @ 0°F / 150 PSI @ 70°F / 90 PSI @ 150°F

D



E



F



G



H



I



J



K



L



M



N



O



SCHEDULE 80 THREADED POLYPROPYLENE FITTINGS

- Manufactured from glass re-inforced polypropylene for strength and durability.
- Schedule 80 design.
- Pressure rated to 150 PSI @ 70°F.

**RECOMMENDED
OPERATING
PRESSURE**

120 PSI @ 0°F / 150 PSI @ 70°F / 90 PSI @ 150°F

TEES

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
A	3/8"	62464	10
A	1/2"	62209	10
A	3/4"	62210	10
A	1"	62211	10
A	1 1/4"	62212	10
A	1 1/2"	62213	—
A	2"	62190	—
A	3"	62214	—

90° STREET ELBOWS

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
D	3/8"	62460	10
D	1/2"	62243	10
D	3/4"	62244	10
D	1"	62245	10
D	1 1/4"	62246	10
D	1 1/2"	62247	10
D	2"	62199	10
D	3"	62248	—

90° PIPE ELBOWS

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
B	3/8"	62465	10
B	1/2"	62215	10
B	3/4"	62216	10
B	1"	62217	10
B	1 1/4"	62218	10
B	1 1/2"	62219	10
B	2"	62191	10
B	3"	62220	—

CROSSES

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
E	3/4"	62262	5
E	1"	62263	5
E	1 1/4"	62264	—
E	1 1/2"	62265	—
E	2"	62202	—

45° STREET ELBOWS

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
C	3/4"	62907	10
C	1"	62908	10
C	1 1/4"	62909	10
C	1 1/2"	62910	10
C	2"	62911	10

PIPE COUPLINGS

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
F	3/8"	62461	10
F	1/2"	62237	10
F	3/4"	62238	10
F	1"	62239	10
F	1 1/4"	62240	10
F	1 1/2"	62241	10
F	2"	62194	10
F	3"	62242	—

PIPE NIPPLES

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
	3/8" x Short	62459	10
	1/2" x Short	62221	10
	1/2" x 3"	62222	10
	3/4" x Short	60554	10
G	3/4" x 4"	62223	10
H	3/4" x 6"	62224	10
	1" x Short	60555	10
G	1" x 4"	62225	10
H	1" x 6"	62226	10
	1 1/4" x Short	60556	10
G	1 1/4" x 4"	62227	10
H	1 1/4" x 6"	62228	10
	1 1/2" x Short	60547	10
	1 1/2" x 4"	62229	10
G	1 1/2" x 6"	62230	10
	2" x Short	60548	10
G	2" x 4"	62192	10
H	2" x 6"	62193	10
	3" x Short	61769	–
H	3" x 6"	62232	–
	4" x Short	62467	–

REDUCER NIPPLES

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
I	1/2" x 3/8"	62455	10
I	3/4" x 1/2"	62233	10
I	1" x 1/2"	62456	10
I	1" x 3/4"	62234	10
I	1 1/4" x 3/4"	62457	10
I	1 1/4" x 1"	62235	10
I	1 1/2" x 1"	62458	10
I	1 1/2" x 1 1/4"	62236	10
I	2" x 1 1/2"	60549	10
I	3" x 2"	61768	–
I	4" x 3"	62938	–

REDUCER BUSHINGS

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
J	3/8" x 1/4"	62466	10
J	1/2" x 1/4"	62267	10
J	1/2" x 3/8"	62268	10
J	3/4" x 1/8"	62269	10
J	3/4" x 1/4"	62270	10
J	3/4" x 3/8"	62271	10
J	3/4" x 1/2"	62272	10
J	1" x 1/8"	62273	10
J	1" x 1/4"	62274	10
J	1" x 1/2"	62275	10
J	1" x 3/4"	62276	10
J	1 1/4" x 3/4"	62277	10
J	1 1/4" x 1"	62278	10
J	1 1/2" x 3/4"	62279	10
J	1 1/2" x 1"	62280	10
J	1 1/2" x 1 1/4"	62281	10
J	2" x 3/4"	62195	10
J	2" x 1"	62196	10
J	2" x 1 1/4"	62197	10
J	2" x 1 1/2"	62198	10
J	3" x 1 1/2"	62282	–
J	3" x 2"	60330	–

PIPE CAPS

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
K	1/2"	62462	10
K	3/4"	62250	10
K	1"	62251	10
K	1 1/4"	62463	10
K	1 1/2"	62253	10
K	2"	62200	10
K	3"	62254	–

PIPE PLUGS

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
L	1/2"	62255	10
L	3/4"	62256	10
L	1"	62257	10
L	1 1/4"	62258	10
L	1 1/2"	62259	10
L	2"	62201	10
L	3"	62260	–

G



H



I



J



K



L



Y-LINE STRAINERS

- Manufactured from glass re-inforced polypropylene.
- Protects and prevents clogging of pipelines, pumps and spray tips.
- Easy access for cleaning.
- Sizes from ½" to 3".
- 6 to 80 mesh 304 stainless steel screens. Screen for 3" is polypropylene reinforced.
- Standard with EPDM gaskets.
- 3" strainer features a ½" drain plug in bottom of cap.

RECOMMENDED OPERATING PRESSURE

½" thru 2": 70 PSI @ 0°F / 90 PSI @ 70°F / 50 PSI @ 150°F
3": 55 PSI @ 0°F / 70 PSI @ 70°F / 40 PSI @ 150°F

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
A	½" with 20 Mesh Screen	61472	12
A	½" with 40 Mesh Screen	61473	12
A	½" with 80 Mesh Screen	61474	12
A	¾" with 20 Mesh Screen	61475	12
A	¾" with 40 Mesh Screen	61476	12
A	¾" with 80 Mesh Screen	61477	12
A	1" with 20 Mesh Screen	61478	12
A	1" with 40 Mesh Screen	61479	12
A	1" with 80 Mesh Screen	61480	12
A	1¼" with 20 Mesh Screen	61738	12
A	1¼" with 40 Mesh Screen	61740	12
A	1¼" with 80 Mesh Screen	61741	12
A	1½" with 12 Mesh Screen	64078	12
A	1½" with 20 Mesh Screen	61488	12
A	1½" with 40-20 Mesh Screen	61489	12
A	1½" with 80-20 Mesh Screen	61490	12
A	2" with 12 Mesh Screen	64098	12
A	2" with 20 Mesh Screen	61493	12
A	2" with 40-20 Mesh Screen	61494	12
A	2" with 80-20 Mesh Screen	61495	12
B	3" with 6 Mesh Screen	62337	–
B	3" with 12 Mesh Screen	62338	–
B	3" with 20 Mesh Screen	62339	–
B	3" with 40 Mesh Screen	62340	–

T-LINE STRAINERS

- Manufactured from polypropylene.
- Sizes in ½", ¾" and 1".
- 20 to 80 mesh 304 stainless steel screens.

RECOMMENDED OPERATING PRESSURE

80 PSI @ 0°F / 100 PSI @ 70°F / 56 PSI @ 150°F

ITEM CODE	DESCRIPTION	PART NO.	STANDARD PACKAGING
C	½" with 20 Mesh Screen	61459	12
C	½" with 40 Mesh Screen	61460	12
C	½" with 80 Mesh Screen	61461	12
C	¾" with 20 Mesh Screen	61464	12
C	¾" with 40 Mesh Screen	61465	12
C	¾" with 80 Mesh Screen	61466	12
C	1" with 20 Mesh Screen	61469	12
C	1" with 40 Mesh Screen	61470	12
C	1" with 80 Mesh Screen	61471	12

MESH SCREEN
for 3" Y-Line Strainer

HIGH DENSITY POLYETHYLENE LIDS

DESCRIPTION	ITEM CODE	PART NO.
22" Lid and ring with air vent		63679
22" Lid, ventless with ring		63863
16" Lid and ring with blue snap-in vent	A	63485
16" Lid and ring with 3" center thread		63868
16" Lid, ventless with ring		60367
16" Lid, ventless	B	60365
16" Ring only		60012
Ethafoam gasket for 16" non-hinged lid		62941
Blue snap-in vent for 16" lid (63485)		63539
8" Lid with blue snap-in vent	C	63480
Blue snap-in vent for 8" lid (63480)		63482
8" Lid, ring and air vent (for 22 vertical and loaf tanks)		60032
5" Lid with ball check air vent, with gasket	D	63484
5" Lid with 2" FPT (does not include vent cap)		63264
5" Lid, hinged (for 52 and 68 Gallon flat bottom and 110 low profile tanks)		63673
EPDM gasket for 5" lid (63264 or 63484)		60366

HINGED LID

This lid is manufactured from a co-polymer material for strength, durability and excellent chemical resistance. Our unique locking tab allows you to easily slip a padlock through it and secure your lid from theft or spills. The lid is interchangeable with a standard 16" lid and ring assembly if you choose to replace your existing lid.

- Easy open/close – opens a full 180 degrees.
- Comes complete with a baffle vent assembly, allowing for adequate venting when bottom filling your tank.

DESCRIPTION	ITEM CODE	PART NO.
22" Complete lid assembly	E	63874
16" Complete lid assembly	E	62532

HINGED LID REPAIR PARTS

DESCRIPTION	PART NO.
16" hinged lid with vent assembly, without ring	62826
16" hinged ventless lid, with ring	63390
Vent assembly	62827
Ring assembly	62828
Hinge assembly	62829
EPDM gasket*	63391
EPDM O-ring for lid**	62830
Neoprene O-ring for ring	62831

*Lid with red center cap or ventless lid requires this gasket

**Lid with black center cap requires this O-ring

LID ACCESSORIES AND REPAIR KIT

DESCRIPTION	PART NO.
2" MPT vent cap with poly screen	63266
2" MPT vent cap, anti-vortex, without screen	63316
3" MPT vent cap with poly screen	63845
Stainless steel screw for 8" and 16" rings	60081
18" Lanyard for 8" lid and 16" non-hinged lid (tethers lid to tank)	62531
Strainer basket for 16" fill-opening (7" depth)	67374
Poly welding gun and rod	60221
Poly welding rod 30'	61879

A

B

C

D

E

HINGED LID
Shown open
and closed

Strainer
Basket

Poly
Welding
Gun

Lanyard

POLYPROPYLENE BULKHEAD FITTINGS / EPDM OR VITON GASKETS

Norwesco's polypropylene fittings come standard with an EPDM gasket. Viton gaskets are available as an option when EPDM may not be suitable for your application. The 2" stainless steel bulkhead fitting comes standard without a gasket.

DESCRIPTION	HOLE SIZE REQUIRED IN TANK FOR INSTALLATION	ITEM CODE	PART NO.
½" Heavy duty double threaded polypropylene fitting	1⅞"	A	62834
¾" Double threaded polypropylene fitting	1⅞"	A	60401
EPDM gasket for ½" and ¾" (62834 and 60401)			60402
Type B Viton gasket for ½" and ¾" (62834 and 60401)			60360
¾" Heavy duty double threaded polypropylene fitting	1⅞"	A	62798
EPDM gasket ¾" (62798)			62799
Type B Viton gasket for ¾" (62798)			62800
1" Double threaded polypropylene fitting	2¼"	A	60427
1¼" Double threaded polypropylene fitting	2¼"	A	60403
1¼" Anti-vortex polypropylene fitting	2¼"	D	63065
EPDM gasket for 1" and 1¼" (60427, 60403 and 63065)			60404
Type B Viton gasket for 1" and 1¼" (60427, 60403 and 63065)			60361
Anti-vortex adapter for 1¼" (60403)			62398
1½" Standard duty double threaded polypropylene fitting	2⅜"	A	63931
EPDM gasket for 1½" (63931)			63938
Type B Viton gasket for 1½" (63931)			63939
1½" Double threaded polypropylene fitting	3"	A	60124
Siphon tube, 1½" x 4⅞" long			63682
Siphon tube, 1½" x 12" long			63279
2" Double threaded polypropylene fitting	3"	A	60405
2" Double threaded 316 stainless steel fitting, less gasket	3"		61767
EPDM gasket for 1½" and 2" (60124, 60405, 63481 and 61767)			60406
Type B Viton gasket for 1½" and 2" (60124, 60405, 63481 and 61767)			60523
2" Standard duty double threaded polypropylene fitting (maximum tank wall thickness = ⅜")	3"	E	63481
2" Heavy duty double threaded polypropylene fitting	3¼"	B	63683
EPDM gasket for 2" (63683)			60336
Type B Viton gasket for 2" (63683)			60008
Siphon tube, 2" short			60335
Siphon tube, 2" x 12" long			63262
2" MPT vent cap with poly screen			63266
2" MPT vent cap, anti-vortex, without screen			63316
Anti-vortex adapter for 2" bulkhead fitting			62399
2" Polypropylene dust plug			60021
2" Self-aligning double threaded polypropylene fitting (designed to install in dome of vertical tank above the liquid level)	4½"		63668
EPDM gasket for 2" self-aligning (63668)			60331
Type B Viton gasket for 2" self-aligning (63668)			60351
3" Double threaded polypropylene fitting (hex nut as shown in photo C)	4½"	C	62299
EPDM gasket for 3" (62299)			60331
Type B Viton gasket for 3" (62299)			60351
2" Polypropylene reducer for 3"			60330
Siphon tube, 3" short			60327
Siphon tube, 3" x 12" long			63263
3" MPT vent cap with poly screen			63845
4" Double threaded polypropylene fitting (hex nut as shown in photo C)	5¾"		62171
EPDM gasket for 4" (62171)			62785
Type B Viton gasket for 4" (62171)			62786
Siphon tube for 4"			62714



BOLTED FITTINGS

POLYPROPYLENE DOUBLE THREADED BOLTED

FITTINGS / EPDM OR VITON GASKETS (Require two gaskets.)

Bolted polypropylene fittings are equipped with 316 stainless steel bolts and come standard with EPDM gaskets. Viton gaskets are available as an option for the fittings.

DESCRIPTION	ITEM CODE	PART NO.
¾" Polypropylene bolted fitting with ss bolts and EPDM gaskets	A	60502
1" Polypropylene bolted fitting with ss bolts and EPDM gaskets	A	60505
EPDM gasket for ¾" and 1"		60498
Type B Viton gasket for ¾" and 1"		60355
1½" Polypropylene bolted fitting with ss bolts and EPDM gaskets	A	60513
2" Polypropylene bolted fitting with ss bolts and EPDM gaskets	A	60516
EPDM gasket for 1½" and 2"		60497
Type B Viton gasket for 1½" and 2"		60356
3" Polypropylene bolted fitting with ss bolts and EPDM gaskets		62471
EPDM gasket for 3"		62048
Type B Viton gasket for 3"		60602

STAINLESS STEEL DOUBLE THREADED BOLTED FITTINGS

Bolts are threaded into the back plate of the fitting so there are no welds or bolt holes that can be potential points of leakage. These fittings come standard without a gasket and require a single gasket that is installed on the inside of the tank. Available gaskets are cross-linked polyethylene, EPDM or Viton.

DESCRIPTION	ITEM CODE	PART NO.
½" 316 Stainless steel double threaded bolted fitting less gasket	B	63216
¾" 316 Stainless steel double threaded bolted fitting less gasket	B	63035
1" 316 Stainless steel double threaded bolted fitting less gasket	B	62948
EPDM gasket for ½", ¾" & 1" (1 required)		63205
Type B Viton gasket for ½", ¾" & 1" (1 required)		63224
Cross-linked polyethylene gasket for ½", ¾" & 1" (1 required)		62950
1¼" 316 Stainless steel double threaded bolted fitting less gasket	B	63036
Cross-linked polyethylene gasket for 1¼" (1 required)		63041
1½" 316 Stainless steel double threaded bolted fitting less gasket	B	63037
EPDM gasket for 1¼" and 1½" (1 required)		63426
Cross-linked polyethylene gasket for 1½" (1 required)		63042
2" 316 Stainless steel double threaded bolted fitting less gasket	B	63038
EPDM gasket for 2" (1 required)		63206
Type B Viton gasket for 1¼", 1½" and 2" (1 required)		63225
Cross-linked polyethylene gasket for 2" (1 required)		62848
3" 316 Stainless steel double threaded bolted fitting less gasket	C	63039
EPDM gasket for 3" (1 required)		63223
Type B Viton gasket for 3" (1 required)		63226
Cross-linked polyethylene gasket for 3" (1 required)		63043
4" 316 Stainless steel 8-bolt double threaded bolted fitting less gasket		63688
EPDM gasket for 4" (1 required)		63690
Viton gasket for 4" (1 required)		63691
Cross-linked polyethylene gasket for 4" (1 required)		63689


STAINLESS STEEL SINGLE THREADED BOLTED FITTINGS


DESCRIPTION	PART NO.
3" 316 Stainless steel single threaded bolted fitting, anti-vortex, less gasket	63233
EPDM gasket for 3" (1 required)	63223
Type B Viton gasket for 3" (1 required)	63226
Cross-linked polyethylene gasket for 3" (1 required)	63043

CON-TECH STAINLESS STEEL DOUBLE THREADED BOLTED FITTINGS

Designed to install in heavy wall tanks. Please contact Norwesco Customer Service for additional information.

DESCRIPTION	PART NO.
1" 316 SS double threaded bolted fitting with ss long bolts & EPDM gaskets	63972
Viton gasket for 1" (2 required)	63978
1½" 316 SS double threaded bolted fitting with ss long bolts & EPDM gaskets	63973
Viton gasket for 1½" (2 required)	63979
2" 316 SS double threaded bolted fitting with ss long bolts & EPDM gaskets	63974
Viton gasket for 2" (2 required)	63980
3" 316 SS double threaded bolted fitting with ss long bolts & EPDM gaskets	63975
Viton gasket for 3" (2 required)	63981

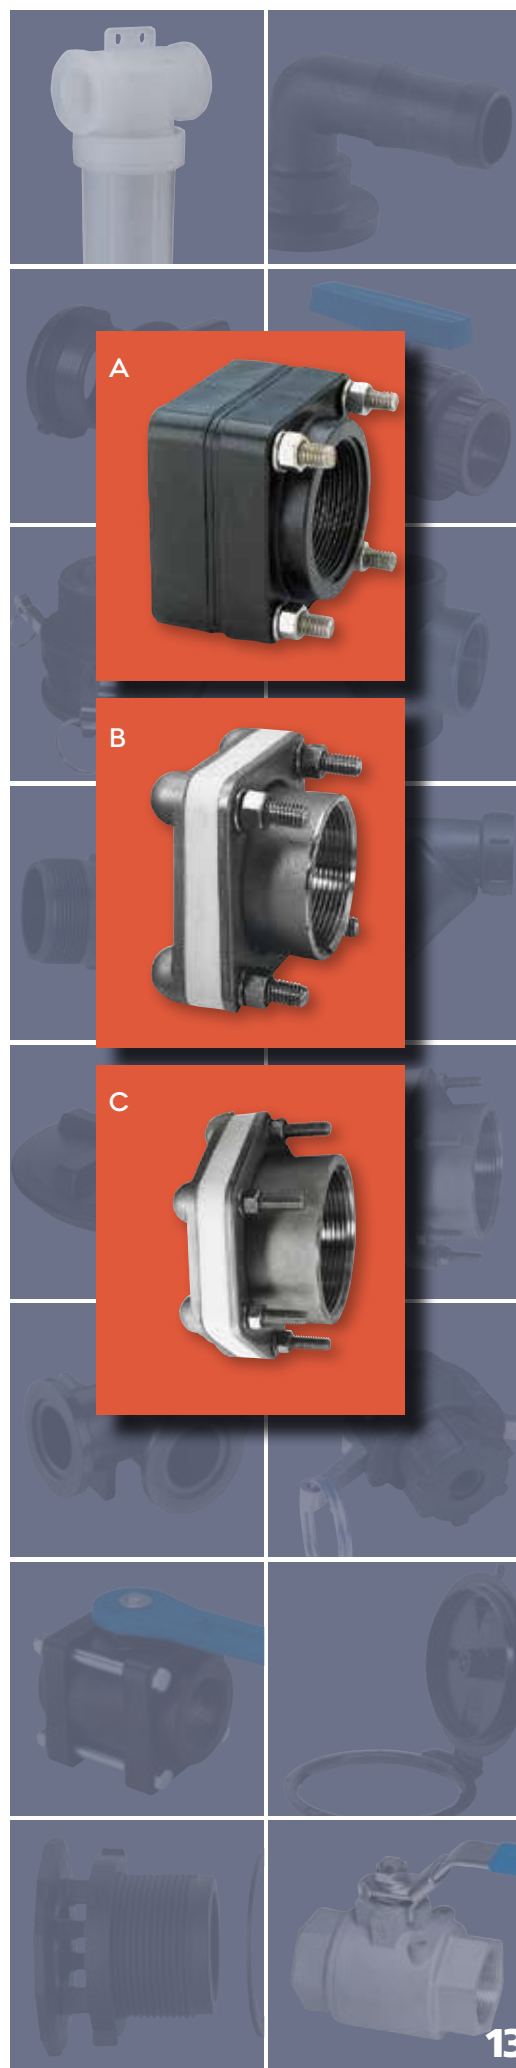

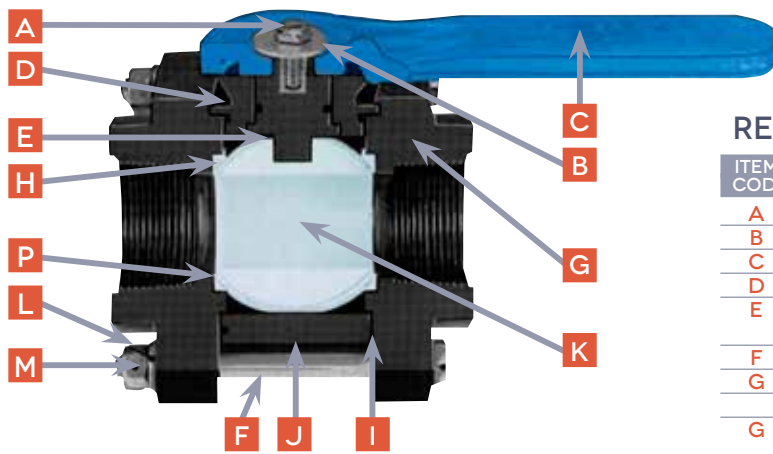

REPLACEMENT PART ITEM CODES

ITEM CODE	DESCRIPTION
A	Stem Cap Screw
B	Stem Flat Washer
C	Valve Handle
D	Viton Stem O-Ring(s)*
E	Valve Stem with Viton O-Ring(s)
F	Stainless Steel Bolt
G	End Flange with Teflon® Seat
G	Male End Flange with Teflon® Seat
G	Male Coupler End Flange with Teflon® Seat

ITEM CODE	DESCRIPTION
G	Flange End Flange with Teflon® Seat
H	Teflon® Seat
I	Large Body EPDM O-Ring Seal
J	Valve Body
K	Valve Ball
L	Stainless Steel Lock Washer
M	Stainless Steel Hex Nut
P	Seat O-Ring

BOLTED BALL VALVE REPLACEMENT PARTS

ITEM CODE	DESCRIPTION	1/2" FP	3/4" FP	1" STD	1" FP	1-1/4" STD	1-1/4" FP	1-1/2" FP	2" STD	2" FP COMPACT	2" FP	3" FP	4" FP	1-1/2" FPNZ	2" STDNZ	2" FPNZ
A	Stem Screw	61347	61347	61347	61347	61347	-	-	-	-	-	-	-	-	-	-
B	Stem Cap Screw & Flat Washer	-	-	-	-	-	61350	61350	61350	61350	61351	61351	61351	61350	61350	61351
C-1	Yellow Blank Handle	61783	61783	61783	61784	61784	61785	61785	61785	61785	61786	61786	62838	61787	61787	61788
C-2	Norwesco Blue Handle	61721	61721	61721	61722	61722	61723	61723	61723	61723	61724	61724	62839	61725	61725	61726
D	Viton Stem O-Ring(s)*	61497	61497	61497	61497	61497	61425	61425	61425	61425	61447	61447	62817	61425	61425	61447
E	Valve Stem w/Viton O-Ring(s)	61359	61359	61359	61446	61446	61360	61360	61360	61360	61361	61361	62818	61360	61360	61361
F	Stainless Steel Bolt, Hex Nut & Lock Washer	61421	61421	61421	61422	61422	61423	61423	61423	61424	61424	62208	62819	61423	61423	61424
G	End Flange w/Teflon® Seat	62051	62052	62053	62054	62055	62056	62057	62059	62316	62060	62065	62820	62057	62059	62060
G	Male End Flange w/Teflon® Seat	-	-	-	-	-	-	-	62064	62317	62063	62066	-	-	-	-
G	Male Coupler End Flange w/Teflon® Seat	-	-	-	-	-	-	-	-	62318	-	-	-	-	-	-
G	Flanged End Flange w/Teflon® Seat	-	-	-	62929	-	-	-	-	62930	-	62931	-	-	-	-
H	Teflon® Seat	62077	62077	62077	62076	62076	62075	62075	62075	62074	62074	62073	62821	62075	62075	62074
I	Large Body EPDM O-Ring Seal	61378	61378	61378	61379	61379	61380	61380	61380	62319	61381	61382	62822	61380	61380	61381
J	Valve Body	61383	61383	61383	61384	61384	61385	61385	61385	62315	61386	61387	62823	61385	61385	61386
K	Valve Ball	61388	61388	61388	61389	61389	61390	61390	61390	62312	61391	61392	62824	61390	61390	61391
N	Top Flange w/Teflon® Seat for Nozzle	-	-	-	-	-	-	-	-	-	-	-	-	62058	62061	62062
O	Nozzle Pipe	-	-	-	-	-	-	-	-	-	-	-	-	61400	61401	61401
P	Seat O-Ring	-	-	-	-	-	-	-	-	-	-	62114	-	-	-	-

*4" requires 2 stem O-rings

MULTI-PORT BALL VALVE REPLACEMENT PARTS

SIZE	REPAIR KIT-EPDM O-RINGS (3) AND TEFLON® SEATS (2)	OPTIONAL REPAIR KIT- VITON O-RINGS (3)	T-BALL	HANDLES	VALVE STEM WITH EPDM O-RING
¾"	61733	60438	60429	61735	60452
2"	60435	60442	60428	61736	60455

SINGLE UNION REPLACEMENT PARTS

SIZE	REPAIR KIT-EPDM O-RINGS (3) AND TEFLON® SEATS (2)	REPAIR KIT- OPTIONAL VITON O-RING (3)	HANDLES	VALVE STEM WITH EPDM O-RING
½"	60430	60437	60444	60451
¾"	60431	60438	60445	60452
1"	60432	60439	60446	60453
1¼"	60433	60440	60447	60454
1½"	60434	60441	60448	60455
2"	60435	60442	60449	60455
3"	60436 *	60443 **	60450	60457

* Includes 4 EPDM O-Rings & 2 Teflon® Seats

**Includes 4 Viton O-rings

STAINLESS STEEL VALVE REPLACEMENT PARTS

DESCRIPTION	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	3"
Repair Kit*	62374	62375	62376	62377	62378	62379	62380	62381
Handle	62369	62370	62370	62371	62371	62372	62372	62373

*Kit includes 2 Teflon® seats, 1 Teflon® body seal and 2 Teflon® stem seals.

CAM ACTION COUPLER REPLACEMENT PARTS

DESCRIPTION	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	3"	4"
EPDM Gasket	61570	61570	61571	61572	61572	61574	61575	62797
Key Ring	61589	61589	61589	61589	61589	61589	61589	61589
Stainless Steel Pin	61582	61582	61582	61585	61585	61585	61584	61584
Stainless Steel Handle	61594	61594	61594	61595	61595	61595	61596	61596
Polypropylene Shims	61715	61715	61716	61717	61717	61718	61719	—
Locking Pin	—	—	—	63545	63545	63545	—	—



Y-LINE STRAINER REPLACEMENT PARTS

DESCRIPTION	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	3"
EPDM Gasket/O-ring*	61452	61452	61750	61750	61561	61561	—
YLS w/o Screen	61307	61308	61309	61748	61287	61288	62334
6 Mesh Screen	—	—	—	—	62306	62306	62231
12 Mesh Screen	—	—	—	—	62307	62307	62249
20 Mesh Screen	61449	61449	61749	61749	61508	61508	62252
40 Mesh Screen	61450	61450	61746	61746	61509	61509	62261
80 Mesh Screen	61451	61451	61747	61747	61510	61510	62400
EPDM Body O-Ring	—	—	—	—	—	—	62266
EPDM Plug O-Ring	—	—	—	—	—	—	62283
Cap only w/Plug & O-Ring	—	—	—	—	61567	61567	62335

*½" - 1¼" are O-rings; 1½" - 3" are gaskets

T-LINE STRAINER REPLACEMENT PARTS

DESCRIPTION	1/2"	3/4"	1"
EPDM Gasket	61537	61537	61537
TLS w/o Screen	61283	61284	61285
20 Mesh Screen	61404	61404	61404
40 Mesh Screen	61405	61405	61405
80 Mesh Screen	61406	61406	61406

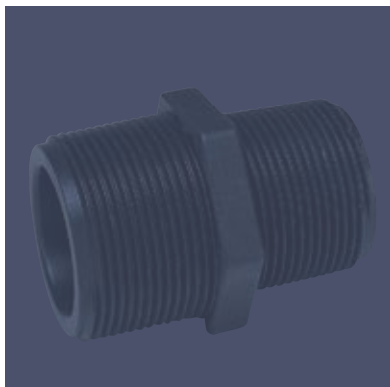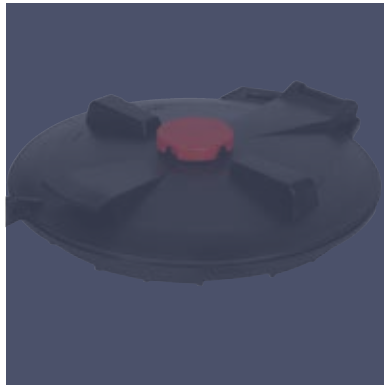

NORWESCO MEANS QUALITY AND SERVICE



Norwesco is your complete source for the high-performance products required in agricultural and industrial fluid handling applications. We take pride in our ability to respond quickly and effectively to your fluid handling needs with same day order processing.

Our customer promise is three-fold:

- Dependable Service
- High Quality Products
- Affordable Prices

GO WITH THE FLOW

Call Norwesco for your fluid handling needs.

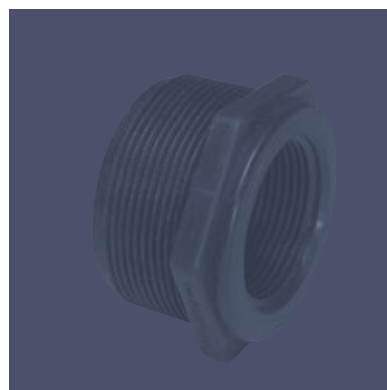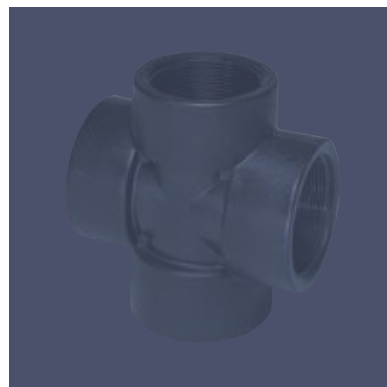

Norwesco, INC.

4365 Steiner Street
P.O. Box 439
St. Bonifacius, MN 55375-0439
Tel (800) 328-3420
Fax (800) 874-2371

www.norwesco.com