



NC SERIES

PULL TYPE SPREADERS
FERTILIZER ONLY



PERFECT FOR **GROWTH-MINDED** FARMERS.

It's no secret – Newton Crouch Spreaders lay out the flattest, most consistent spread pattern in the industry. The NC Series provides the perfect spreaders for any operation from small turf fields to large acreage farms. Built tough and with more 304 stainless than the competition – the NC Series will deliver years of service with low maintenance and high satisfaction.

“The set up of my spreader is **quick and easy**. If I need to change quantity or distance, I can do it fast and get back to **spreading without issue**.”

— DON LANGMO —
LANGMO FAMILY RANCH | FLORIDA

FIVE MODELS. ONE PURPOSE.

A superior design with fewer moving parts, NC Series spreaders deliver low maintenance and simple setup. All models feature a rugged construction with stainless steel to prevent corrosion and breakdown. Designed for fertilizer only, the NC Series delivers a 50 ft. spread pattern with dual spinners. NC Series spreaders utilize many common parts making them field serviceable and the most practical choice on the market.

SINGLE AXLE SPREADERS

NC1500

- Capacity: 1.5-Ton (50 ft.³)
- Wheel Centers: 62"

NC2000

- Capacity: 2-Ton (74 ft.³)
- Wheel Centers: 77"

STANDARD FEATURES:

- 304 Stainless Steel Hull, Dishes, Blades, Floor
- Chain: 7" Stainless Conveyor
- Drive: 540 PTO Spinner
- Manual Drive Engagement, Rope Pull
- High-Low Speed Delivery System
- Universal Joint on Drive Shaft
- Trailer Frame: Heavy Duty Reinforced Tubing, Powder Coated, Blue
- Hubs: 6-Bolt
- Round Axle, Single
- Tires: 11L X 15, 8 Ply
- Hitch: Category 3
- One Safety Chain
- 50 Ft. Swath with Dual Spinners



TANDEM AXLE SPREADERS

NC5000

- Capacity: 5-Ton (163 ft.³)
- Wheel Centers: 77"
- Hubs: 6-Bolt
- Tires: 11L x 15, 8 ply

NC6000

- Capacity: 6-Ton (204 ft.³)
- Wheel Centers: 80.5"
- Hubs: 8-Bolt
- Tires: 16.5 x 16.1, 10 ply

STANDARD FEATURES:

- 304 Stainless Steel Hull, Dishes, Blades, Floor
- Inverted Vee Inside Hull, Stainless Steel
- Fitted Tarp with Stainless Bow
- Chain: 7" Stainless Conveyor
- Drive: 540 PTO Spinner
- Manual Drive Engagement, Rope Pull
- High-Low Speed Delivery System
- Universal Joint on Drive Shaft
- Bolt On Hull to Trailer
- Trailer Frame: Heavy Duty Reinforced Tubing, Powder Coated, Blue
- Herculiner Coating; Top of Trailer
- Round Axle, Tandem
- Hitch: Category 3
- Two Safety Chains
- 50 ft. Swath with Dual Spinners

NC8000

- Capacity: 8-Ton (225 ft.³)
- Wheel Centers: 82.5"
- Hubs: 8-Bolt
- Tires: 19L x 16.1, 10 ply
- Brakes: Hydraulic Single Axle Surge




FEATURES TO FIT YOUR OPERATION

Whether you are spreading on corn fields or sports fields, NC Series Spreaders can be customized for optimal performance. At Newton Crouch, we understand that not all capacities, wheel centers, and tarps are ideal for all operations. Tailor your equipment to have the features you need and none you don't so that you can feel confident that your spreader will add value to your operation for years to come.

AVAILABLE OPTIONS:

- Hydraulic Engagement
- Hydraulic Spinners
- Variable Rate
- Window
- Wheel Centers: Narrow & Special Widths
- Tires: See Table on Opposite Page
- Road Rated Tires Available for All Models
- Enclosures and Bearings in Stainless Steel
- Tarp: Fitted with Stainless Steel Truss Bow or Side-To-Side with or without End Caps
- Brakes: Hydraulic Surge on Single Axle
- Lights: Stop, Tail, Turn

NC Series Bolt-On

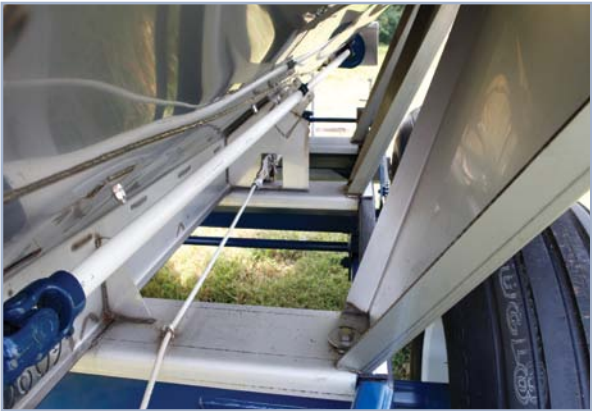

*Provides Easy Maintenance of the Trailer.
Standard on NC5000, NC6000, and NC8000 only.*

NC Series Controller Units (NCRAVX)



Hydraulic Conveyor and Spinner Motors

NC SERIES SPREADER SPECIFICATIONS					
MODEL	NC1500	NC2000	NC5000	NC6000	NC8000
Capacity	1.5-Tons	2-Tons	5-Tons	6-Tons	8-Tons
Hopper Capacity (Struck)	50 ft. ³	74 ft. ³	163 ft. ³	204 ft. ³	255 ft. ³
Hopper Capacity (Heaped)	55 ft. ³	79 ft. ³	179 ft. ³	224 ft. ³	280 ft. ³
Weight (Empty)	1,510 lbs.	1,665 lbs.	2,310 lbs.	3,560 lbs.	3,710 lbs.
Length	166 in.	166 in.	188 in.	221 in.	221 in.
Height (Ground to Top)	62 in.	68 in.	86 in.	88 in.	103 in.
Hopper Width	60 in.	72 in.	92 in.	92 in.	92 in.
Hopper Length	72 in.	71 in.	96 in.	120 in.	120 in.
Wheel Centers	62 in.	77 in.	77 in.	80.5 in.	83.25 in.
Wheel Centers, Options	N/A	N/A	61.5 or 72 in.	61.5 or 72 in.	N/A
Tires, Standard	11L x 15, 8 ply	11L x 15, 8 ply	11L x 15, 8 ply	16.5 x 16.1, 10 ply	19L x 16.1, 10 ply
Tires, Optional	12.5L x 15, 8 ply	12.5L x 15, 8 ply	12.5L x 15, 8 ply	19L x 16.1, 10 ply	11R/22.5
Bolt on Hull to Trailer	N/A	N/A	Standard	Standard	Standard




Heavy Duty Tarp Bow Truss in Stainless



Stainless PTO Stand



Belt Driven Spinners

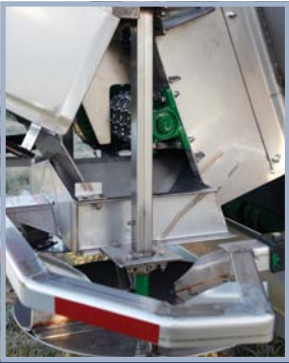

Stainless Enclosures / Bearings



Hydraulic Engagement



SETTING THE STANDARD SINCE 1940

Newton Crouch Company, LLC has been a leader in the Ag Industry since 1940. Known for durable, well-built equipment and knowledgeable staff, Newton Crouch is the spreader growers return to year after year. Operators agree that Newton Crouch spreaders are the easiest to set up and adjust for the most desirable spread pattern. Experience The Newton Crouch Standard for yourself.



newtoncrouch.com | 1.800.241.1350